


Panelling Made Easy
Easy to Handle and Install
Revolutionary New Design
Waterproof Panels

GEO[®] panel

Geo-panel Wide - 1m Wide Waterproof PVC Panelling

- 1m Wide Waterproof PVC Tongue & Groove panelling
- 100% waterproof PVC core.
- Light and easy to fit.
- No wet trades required.
- Suitable for both wet and dry areas.
- Non-porous, hygienic, mould free.
- Virtually maintenance free wipe clean surface.
- 10 Gloss Finishes.
- No tiling or grouting to discolour or leak.
- 10mm thick, heavy duty recyclable PVC.
- Geo-panel PVC trims available in Gloss White and Bright Silver.


1m Width
2.4m Height
10mm Depth

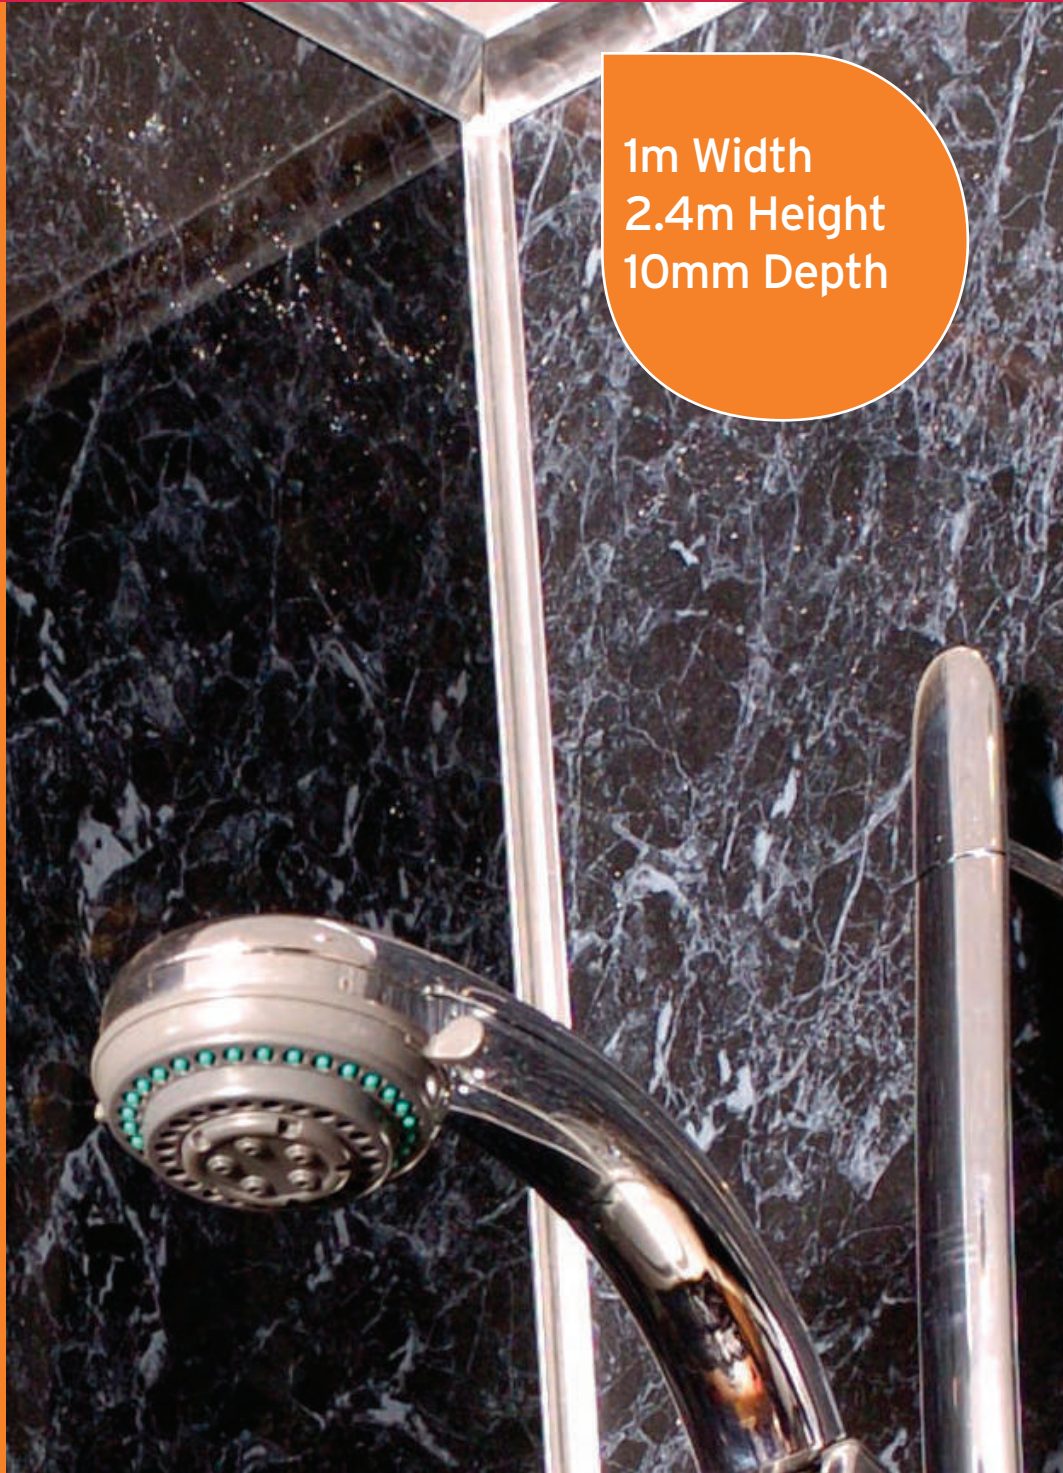


Class 1 Fire rated - SUITABLE FOR COMMERCIAL AND DOMESTIC USE

 **freefoam**
Building Products

Geo-panel Wide

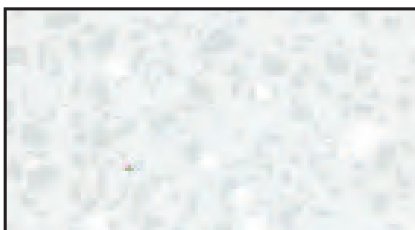


DIAMOND WHITE STONE
(GE7WDC)

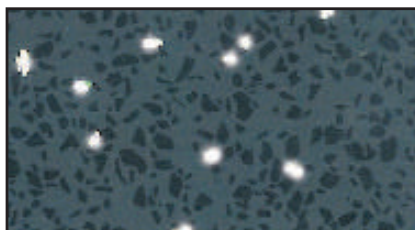

DIAMOND BLACK STONE
(GE7BDC)




BLACK GRANITE
(GE7BGC)

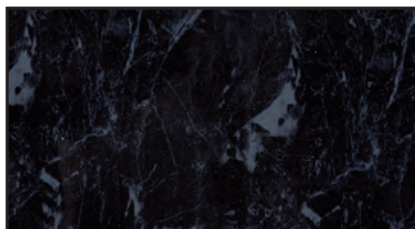


BLACK MARBLE
(GE7BMC)



TRAVERTINE MARBLE
(GE7TRC)

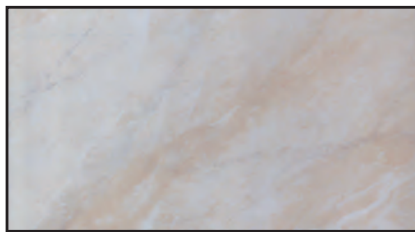

PERGAMON MARBLE
(GE7PMC)

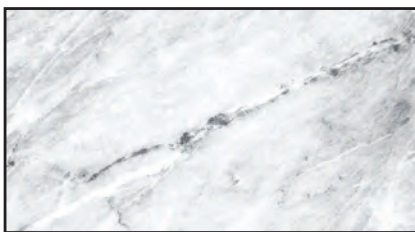


LIGHT GREY MARBLE
(GE7LGM)



IVORY MARBLE
(GE7IMC)




WHITE MARBLE
(GE7WMC)




WHITE
(GE7WHC)

FITTING INSTRUCTIONS



TIMBER BATTENS
45mm x 21mm
Battens if fitted must be at a maximum distance of 500mm apart.

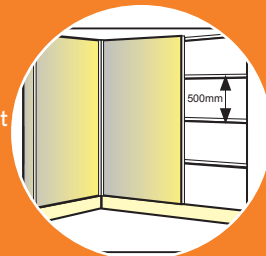

PANEL FIXING
Fit panels 3mm above bath, shower tray or floor. Seal expansion gap with sealant.

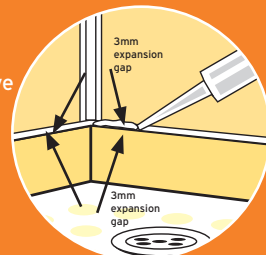

PANEL SEALING IN WET AREAS
Seal all tongue and groove joints with sealant. Always seal inside each profile prior to inserting

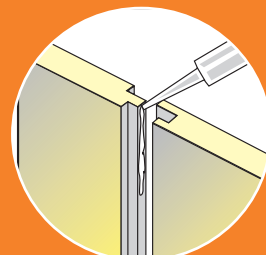

BASE SEAL TRIM
White (GET7BSWH)
Silver (GET7BSSI)

PVC trims available in Gloss White and Bright Silver.




INTERNAL CORNER TRIM
2400mm Used on internal 90° corners with sealant.

White (GET7ICWH)
Silver (GET7ICSI)



EXTERNAL CORNER TRIM
2400mm Used on external 90° corners with sealant.

White (GET7ECWH)
Silver (GET7ECSI)



U TRIM
2400mm Finishing touches end cap for square cut edge panel, sealing with sealant.

White (GET7UTWH)
Silver (GET7UTSI)



JOINING AND STACKING TRIM
2400mm Used to mount panels side by side, or above each other.

White (GET7HTWH)
Silver (GET7HTSI)

Maintenance: **Abrasive cleaners and bleaches must NOT be used on Geo-panel panelling.**

Freefoam Plastics Ltd.
Central Commercial Park
Centre Park Road
Cork
Ireland
T 021 496 6311
F 021 496 5273
sales@freefoam.com
www.freefoam.com

Freefoam Plastics (UK) Ltd.
77-83 St. James Mill Road
Northampton
NN5 5JP
UK
T 01604 591110
F 01604 580299
sales@freefoam.com

freefoam
Building Products